

Orona 3G

1015


Machine-room-less electrical gearless solutions (MRLG)

High efficiency for residential and low rise commercial developments. Optimum use of space and latest direct drive (gearless) technology. The customised solution. Enhanced flexibility and performance.

General specifications

Load	320 to 1,000 kg
Capacity	4 to 13 persons
Speed	1 - 1.6 m/s
Maximum travel	60 m
Maximum floors served	16 - 21 floors
Entrances	1 front / 2 open through
Drive system	Direct gearless
Controller	ARCA III controller, low energy consumption multiprocessor
Door types	Automatic side-opening / Automatic central-opening
Clear door opening	From 600 to 1,500 mm (in 100 mm increments)
Door height	2,000 / 2,100 / 2,200 / 2,300 mm
Car dimensions	Parametric car dimensions
Internal car height	2,100 / 2,200 / 2,300 / 2,400 mm
Aesthetic solutions	Domo Reference Packs Domo Selection Packs / Domo Plus

Standard Optional

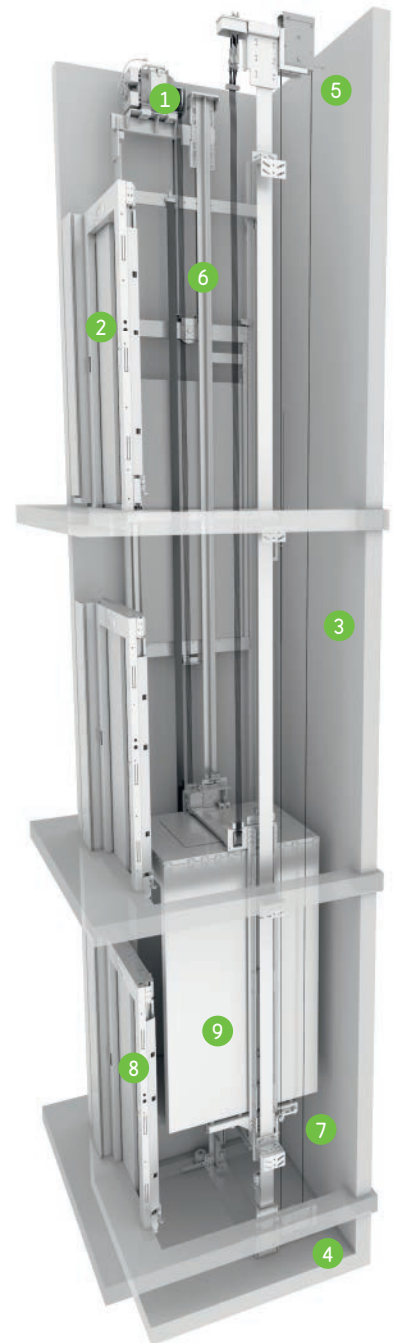

1 DRIVE

Compact, quiet, gearless, energy efficient, speed regulated (VVVF) permanent magnet electric motor.



2 DOORS

Compact permanent magnet motor for fast, accurate and quiet door operation giving the most advanced performance. Advanced door opening and photoelectric curtain. Optional Solid Door for high flow situations.



3 PARAMETRIC/ FLEXIBLE

Flexible car and door configurations ensure available shaft dimensions can be optimised (optional).



4 ACCESSIBLE SPACE BELOW THE PIT

Adapts the lift to suit buildings which have an accessible space below the pit (optional).



5 REDUCED HEADROOM

Optional feature to allow the reduction of the shaft headroom when required, whilst maintaining the enhanced safety and protection for maintenance staff.



6 TRACTION ROPES

Orona small diameter ropes replace traditional steel ropes. As a result of their lighter weight, longer lifespan and greater flexibility, it is possible to use a more compact, efficient and eco-friendly gearless machine.



7 SHAFT USABILITY

Lifts designed especially to use all the shaft space available, obtaining a good relation between the space available and the number of passengers to be transported.



8 AUTOMATIC RESCUE SYSTEM

With floor level indication to ensure fast, efficient and safe evacuation of passengers in the event of an emergency. As an option, the system can incorporate a fully-automatic rescue device to evacuate passengers in the event of a power failure.



9 TWO-WAY COMMUNICATIONS

Between the lift and the emergency 24-hour Service Call Centre according to EN 81-28.



ECO-EFFICIENCY



ADAPTABILITY



DESIGN AND ACCESSIBILITY



CONTROL AND SAFETY

